

CATV

56EYA 2U Series High Power Er/Yb Doped Fiber Amplifier 32*23dBm



■ Performance characteristics


- ◆ Adopts world top brand pump lasers and the OFS fiber of United States, advanced LG switch low-power circuit design, greatly reducing the overall power consumption and heat.
- ◆ Perfect APC, ACC, ATC control, users use in different networks, good ventilation design and temperature-controlled fan, ensure the long life and high reliability of PUMP laser.
- ◆ Using digital control chip, remote or local output power adjustable.
- ◆ Excellent protection circuit design, with light detection, optical return loss monitoring. Great protection of lasers and light path safety.
- ◆ Built-in low-noise preamplifier eliminates the need for cascaded EDFA, allowing input light to be as low as -5dBm, greatly reducing CNR and MER degradation.
- ◆ Demultiplexer for 1310/1490/1560nm EPON and GPON. It greatly facilitates network applications with PON. Low noise figure (type $\leq 4.5\text{dB}$, Max $\leq 5.0\text{dB}$);
- ◆ The total output optical power is optional: 2-10W (33-40dBm);
- ◆ The front panel can be removed and replaced flexibly according to the number of output ports; Can add a built-in optical switch module to facilitate the expansion of the device function; Cooling fan supports online replacement;
- ◆ The front panel LCD provides the operating parameters and alarms of the entire unit. RJ45 provides serial communication and SNMP network management interface; Carrier-grade dual power hot backup, CPU assignable power.

■ Applications

The 56EYAx series high power amplifier is a high power multi-output optical fiber amplifier with a gain spectrum bandwidth of 1535~1565nm. It is mainly designed for CATV or 1~8 continuous strip channels (ITU wavelength) applications. It provides a flexible, low-cost solution for large-scale FTTH coverage of CATV systems in large and medium-sized cities.

56EYAx can achieve single-wavelength cable TV transmission, CWDM single-fiber three-wave, flat-gain type, DWDM; its reliable and excellent performance ratio between the main application of FTTH, FTTB, DBS, MMDS, FTTX pon, is to build CATV large Medium-sized optical fiber transmission network is an important equipment.

■ Block diagram

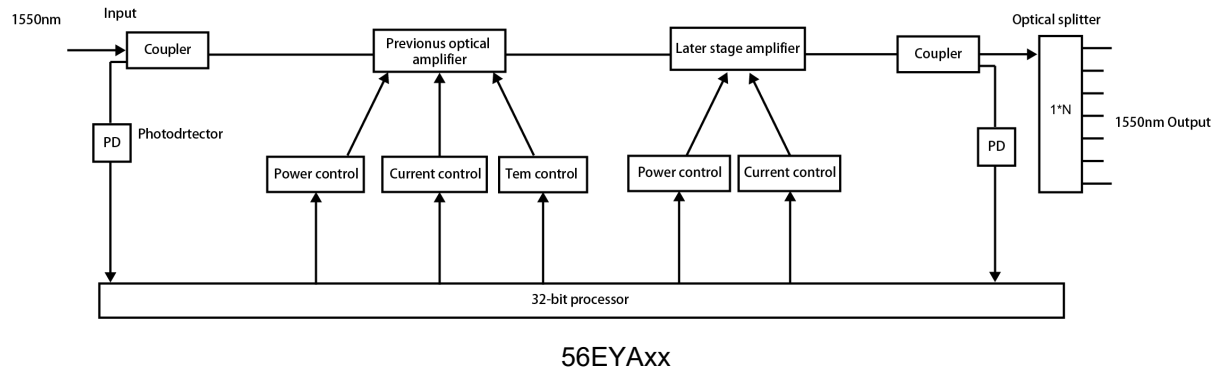

■ Limit parameter

Technical parameters		56EYAx
Max wavelength		1535-1565nm
Minimum input power		-10dBm
Max input power		+10dBm
Limited working temperature		-25°C ~+70°C
Limited working voltage		AC90~265V&DC30~72V&DC30~72V

■ Technical parameters

Technical parameters		56EYAx
Wavelength		1535-1565nm
Input power		-5dBm~+10dBm (normal input -2dBm~+5dBm)
Output power		32*23dBm
Output port		SC: 16/32/64; LC: 32/64/128
Each output power		10~23dBm or customized
Noise		< 5.0dB (Pin=0dB)
Polarization dependence loss (PDL)		< 0.3dB
Polarization dependence gain (PDG)		< 0.4dB
Polarization mode dispersion (PMD)		< 0.3dB
Pump leakage power		< -30dBm

